

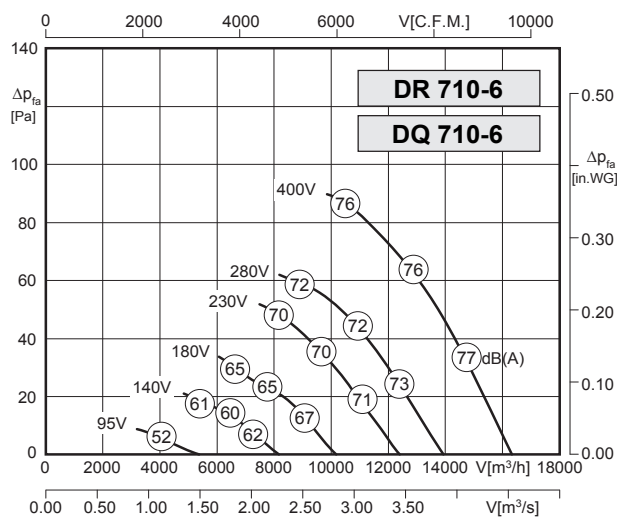


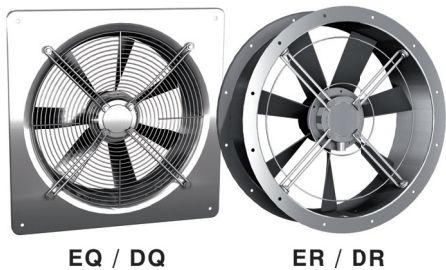

Typ / Type : DR/DQ 710-6		Art.-No. : E10-71080 / E00-71080	
U	400V (50Hz)	Δpfa min	-- Pa
P ₁	0,87 kW	ΔI	-- %
I _N	1.8 A	I _A / I _N	2.8
n	835 min-1		IP54
C _{400V}	-- μF		01.006
tR	70 °C		32 / 31 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	68	68	70	73	71	68	62

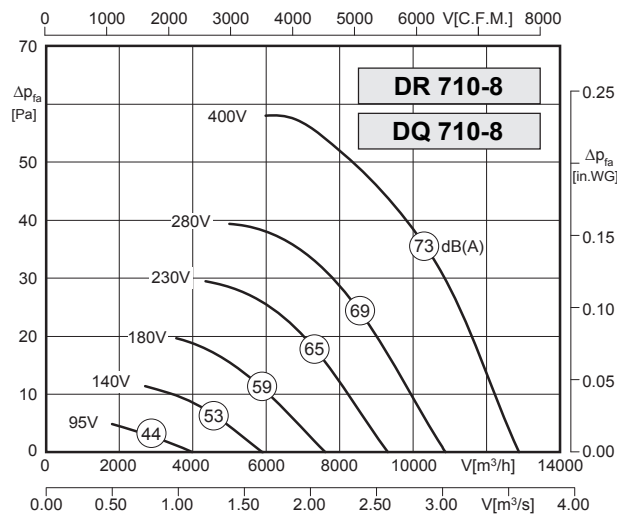

Typ / Type : DR/DQ 710-8		Art.-No. : E10-71090 / E00-71090	
U	400V (50Hz)	Δpfa min	-- Pa
P ₁	0,49 kW	ΔI	-- %
I _N	1.1 A	I _A / I _N	2.0
n	620 min-1		IP54
C _{400V}	-- μF		01.006
tR	70 °C		30 / 29 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	54	63	64	63	64	58	51

