

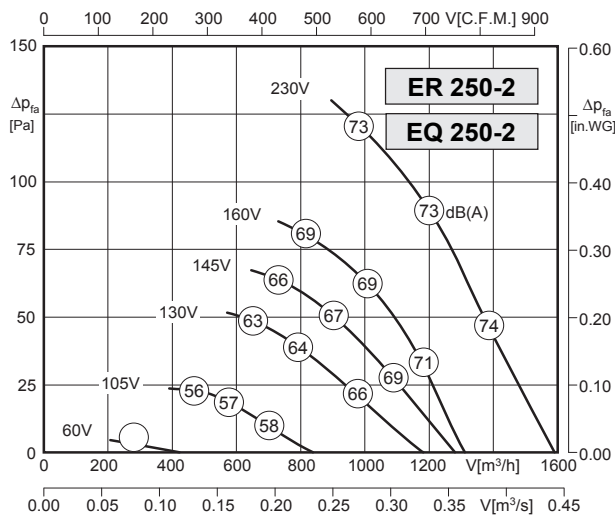


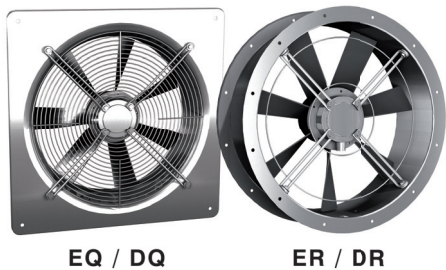

Typ / Type : ER/EQ 250-2		Art.-No. : E10-25001 / E00-25001	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0,14 kW	ΔI	-- %
I _N	0.60 A	I _A / I _N	1.8
n	2600 min-1		IP44
C _{400V}	4 μF		01.009
t _R	60 °C		4 / 4,5 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	46	62	68	67	66	64	57

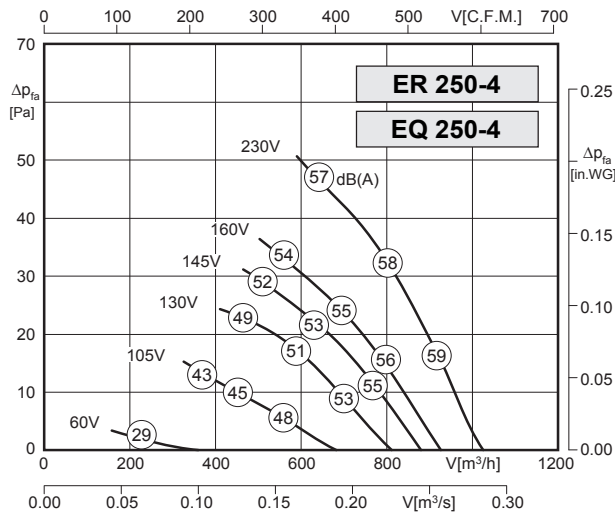

Typ / Type : ER/EQ 250-4		Art.-No. : E10-25000 / E00-25000	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0,06 kW	ΔI	-- %
I _N	0.27 A	I _A / I _N	1.6
n	1270 min-1		IP44
C _{400V}	1.5 μF		01.009
t _R	70 °C		4 / 4,5 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	41	47	50	51	52	47	36

