

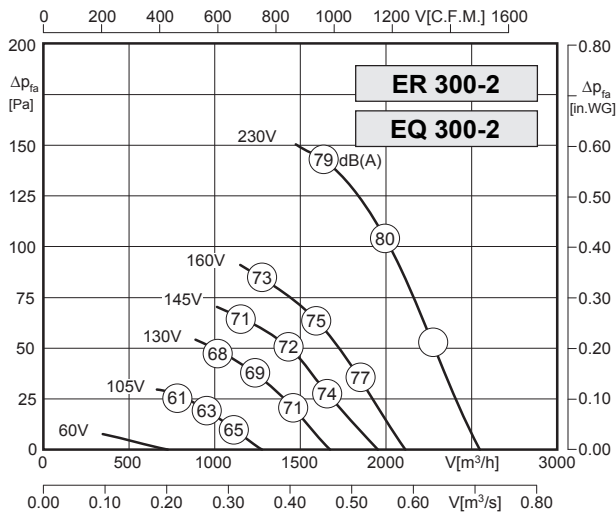


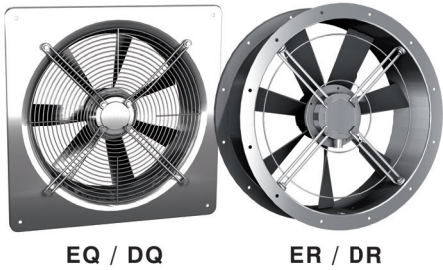

Typ / Type : ER/EQ 300-2		Art.-No. : E10-30001 / E00-30001	
U	230V (50Hz)	Δpfa min	– Pa
P ₁	0.22 kW	ΔI	14 %
I _N	0.95 A	I _A / I _N	1.8
n	2500 min ⁻¹		IP44
C _{400V}	6 μF		01.009
t _R	60 °C		5 / 6 kg

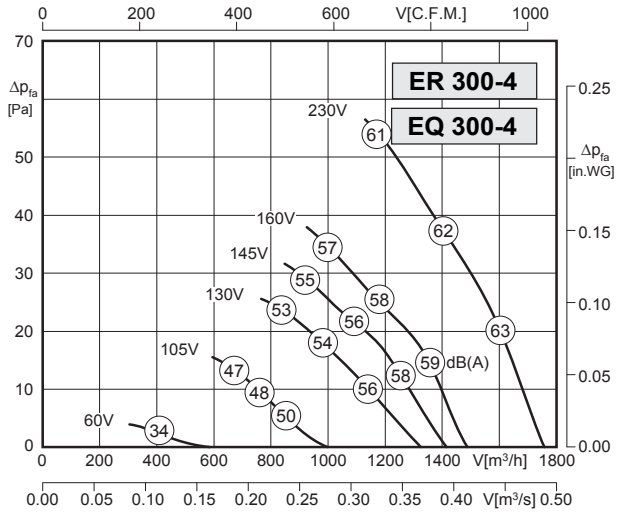

Typ / Type : ER/EQ 300-4		Art.-No. : E10-30000 / E00-30000	
U	230V (50Hz)	Δpfa min	– Pa
P ₁	0.10 kW	ΔI	– %
I _N	0.44 A	I _A / I _N	1.6
n	1270 min ⁻¹		IP44
C _{400V}	3 μF		01.009
t _R	55 °C		5 / 6 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	55	64	74	73	73	70	62

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	46	53	54	55	55	51	39

01.009

