

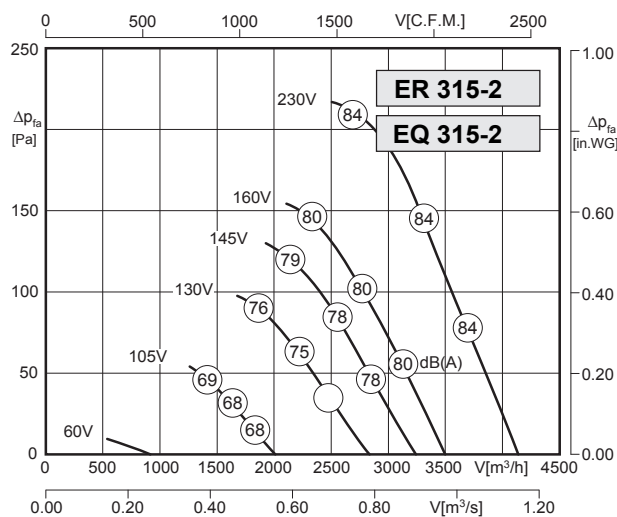


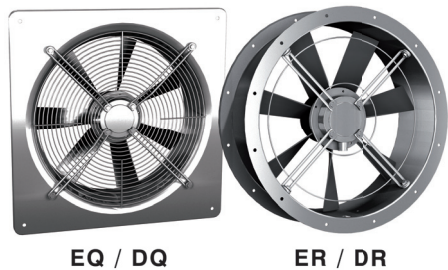

Typ / Type : ER/EQ 315-2		Art.-No. : E10-31501 / E00-31501	
U	230V (50Hz)	Δpfa min	-- Pa
P1	0,69 kW	ΔI	27 %
IN	3.0 A	IA / IN	2.4
n	2610 min-1		IP54
C400V	14 μF		01.025
tR	50 °C		10/10,5 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	57	68	75	78	78	75	66

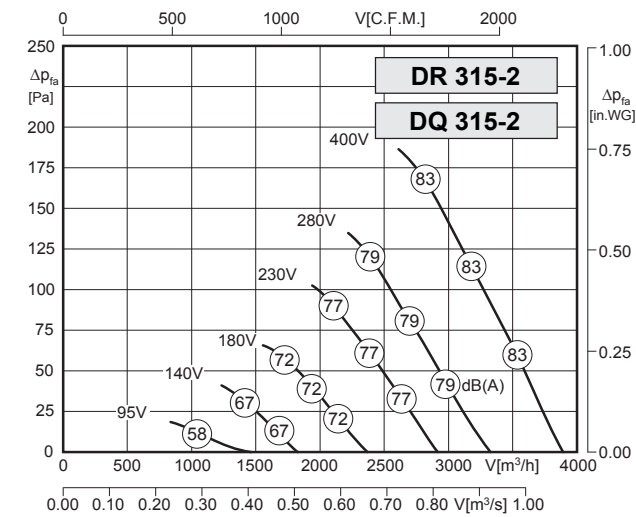

Typ / Type : DR/DQ 315-2		Art.-No. : E10-31560 / E00-31560	
U	400V (50Hz)	Δpfa min	-- Pa
P1	0,57 kW	ΔI	-- %
IN	0.95 A	IA / IN	2.8
n	2460 min-1		IP54
C400V	-- μF		01.006
tR	60 °C		8,5 / 9 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	57	68	75	78	78	75	66

