

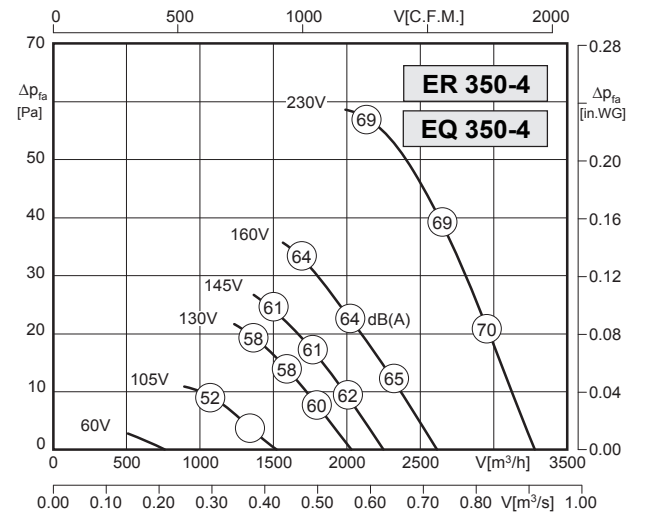


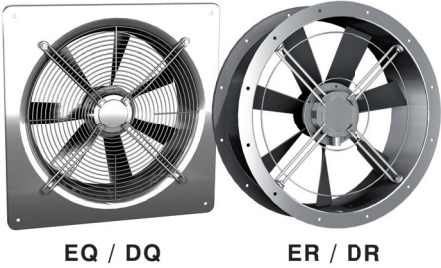

Typ / Type : ER/EQ 350-4		Art.-No. : E10-35005 / E00-35005	
U	230V (50Hz)	Δpfa min	– Pa
P1	0.15 kW	ΔI	12 %
IN	0.65 A	IA / IN	2.0
n	1300 min-1		IP54
C400V	3 μF		01.025
tr	65 °C		6 / 8 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	48	56	62	64	65	63	54

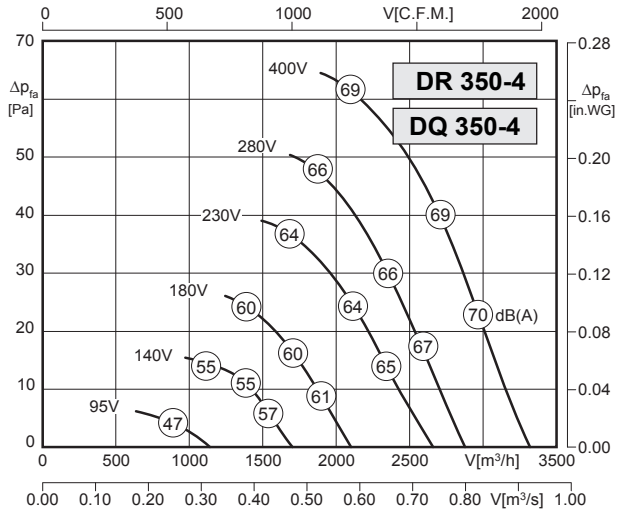

Typ / Type : DR/DQ 350-4		Art.-No. : E10-35055 / E00-35055	
U	400V (50Hz)	Δpfa min	– Pa
P1	0.15 kW	ΔI	– %
IN	0.35 A	IA / IN	2.4
n	1330 min-1		IP54
C400V	– μF		01.006
tr	65 °C		6 / 8 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	48	56	62	64	65	63	54

01.006

01.025

