

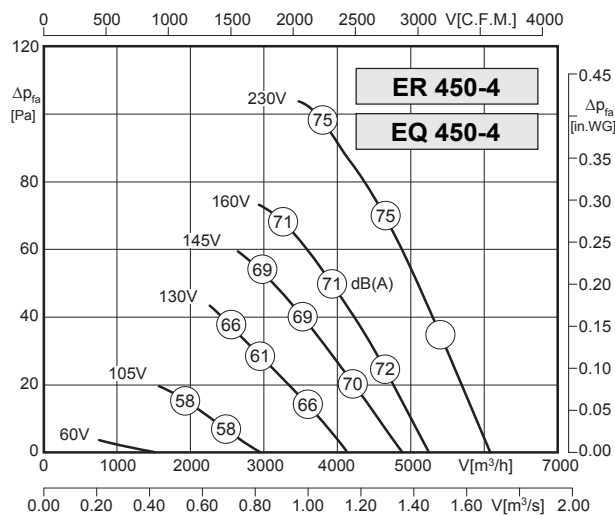


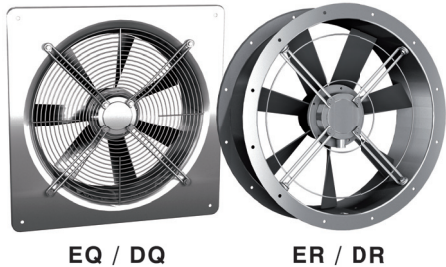

Typ / Type : ER/EQ 450-4		Art.-No. : E10-45005 / E00-45005	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0,33 kW	ΔI	26 %
I _N	1.5 A	I _A / I _N	2.5
n	1360 min-1		IP54
C _{400V}	8 μF		01.025
t _R	55 °C		9 / 10 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	54	64	67	69	70	67	60

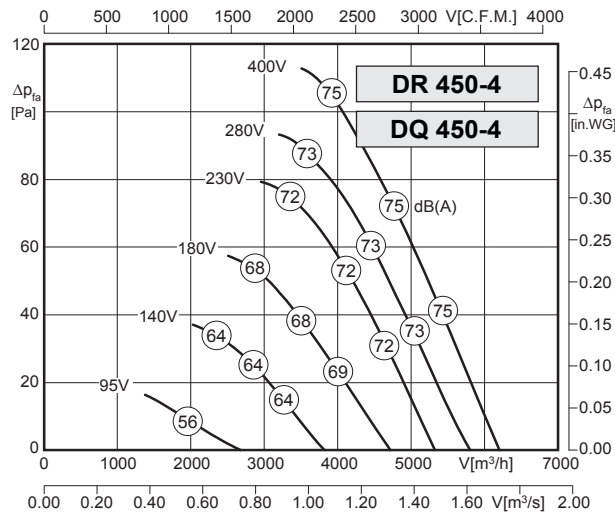

Typ / Type : DR/DQ 450-4		Art.-No. : E10-45055 / E00-45055	
U	400V (50Hz)	Δpfa min	-- Pa
P ₁	0,33 kW	ΔI	5 %
I _N	0.75 A	I _A / I _N	1.8
n	1390 min-1		IP54
C _{400V}	-- μF		01.006
t _R	60 °C		9 / 10 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	54	64	67	69	70	67	60

