

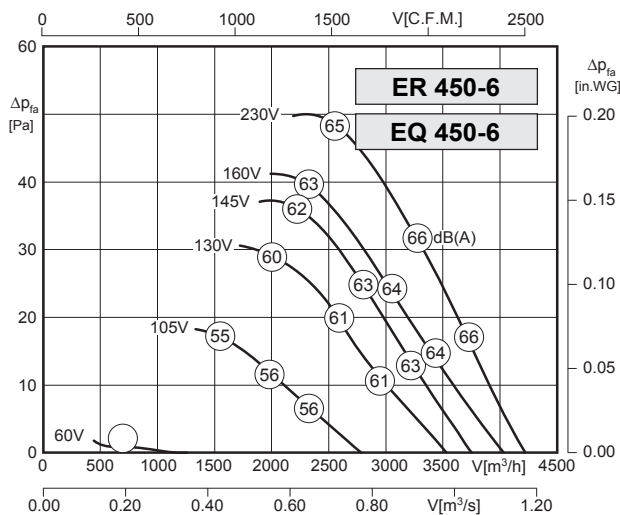


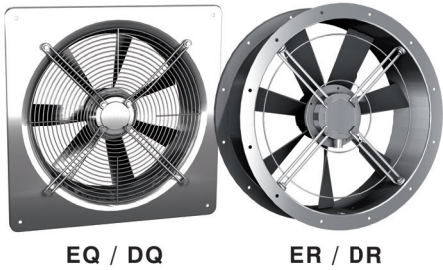

Typ / Type : ER/EQ 450-6		Art.-No. : E10-45007 / E00-45007	
U	230V (50Hz)	Δpfa min	– Pa
P1	0.14 kW	ΔI	8 %
IN	0.78 A	IA / IN	2.3
n	930 min-1		IP54
C400V	4 μF		01.025
tr	70 °C		9 / 10 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	46	57	58	58	60	55	47

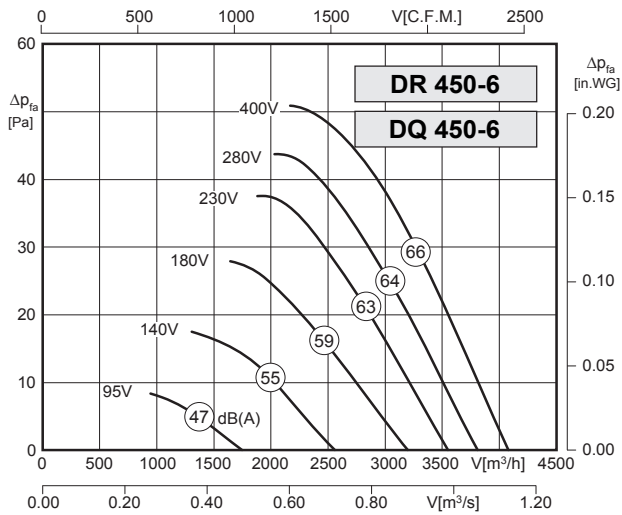

Typ / Type : DR/DQ 450-6		Art.-No. : E10-45057 / E00-45057	
U	400V (50Hz)	Δpfa min	– Pa
P1	0.13 kW	ΔI	– %
IN	0.25 A	IA / IN	3.0
n	900 min-1		IP54
C400V	– μF		01.006
tr	60 °C		9 / 10 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	46	57	58	58	60	55	47

01.006

