




EQ / DQ




ER / DR

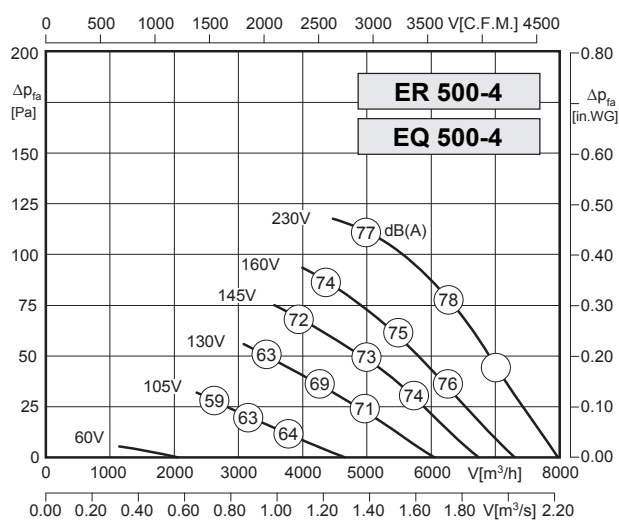

Typ / Type : ER/EQ 500-4		Art.-No. : E10-50005 / E00-50005	
U	230V (50Hz)	Δp_{fa} min	– Pa
P ₁	0,49 kW	ΔI	21 %
I _N	2,3 A	I _A / I _N	2,6
n	1375 min ⁻¹		IP54
C _{400V}	12 µF		01.025
t _R	50 °C		13 / 16 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA ₅ [dB(A)] Gehäuse / casing	56	66	71	71	70	68	62

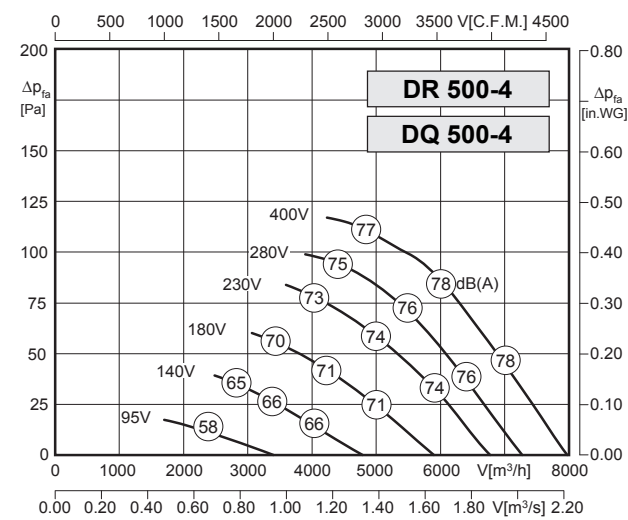

Typ / Type : DR/DQ 500-4		Art.-No. : E10-50055 / E00-50055	
U	400V (50Hz)	Δp_{fa} min	– Pa
P ₁	0,41 kW	ΔI	– %
I _N	1,0 A	I _A / I _N	3,5
n	1370 min ⁻¹		IP54
C _{400V}	– µF		01.006
t _R	60 °C		13 / 16 kg

LWA _{rel} A-bewertet bei V=0,5*V _{max} LWA _{rel} A-weighted at V=0,5*V _{max}	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA ₅ [dB(A)] Gehäuse / casing	56	66	71	71	71	68	62

