

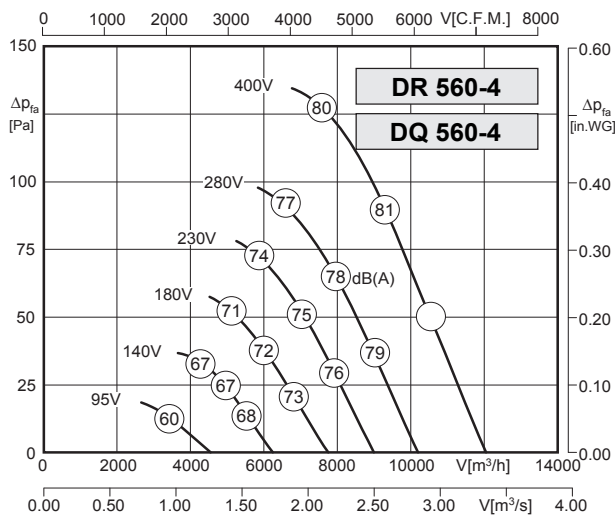


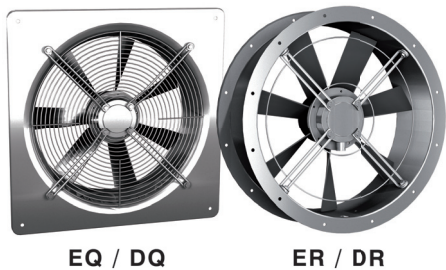

Typ / Type : DR/DQ 560-4		Art.-No. : E10-56053 / E00-56053	
U	400V (50Hz)	Δpfa min	-- Pa
P ₁	0,81 kW	ΔI	-- %
I _N	1.7 A	I _A / I _N	2.8
n	1240 min-1		IP54
C _{400V}	-- μF		01.006
tR	50 °C		16 / 19 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	59	70	74	74	71	67	60

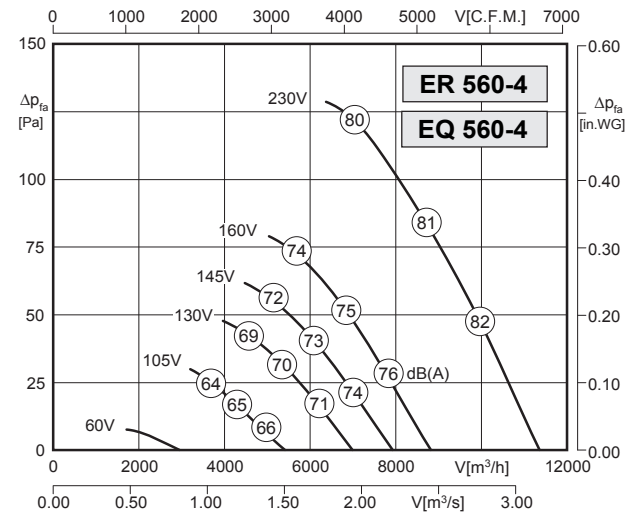

Typ / Type : ER/EQ 560-4		Art.-No. : E10-56008 / E00-56008	
U	230V (50Hz)	Δpfa min	-- Pa
P ₁	0,83 kW	ΔI	5 %
I _N	3.80 A	I _A / I _N	1.8
n	1200 min-1		IP54
C _{400V}	16 μF		01.024
tR	40 °C		16 / 19 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	59	70	74	74	71	67	60

