

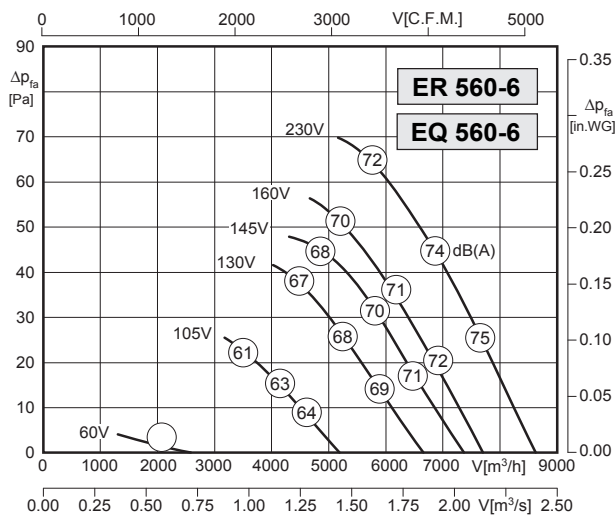


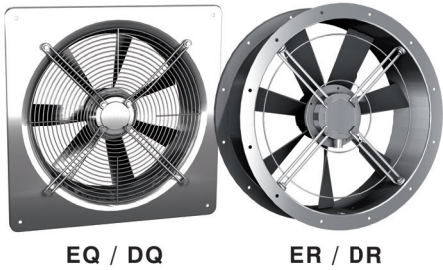

Typ / Type : ER/EQ 560-6		Art.-No. : E10-56001 / E00-56001	
U	230V (50Hz)	Δpfa min	– Pa
P ₁	0.38 kW	ΔI	18 %
I _N	1.80 A	I _A / I _N	2.5
n	920 min-1		IP54
C _{400V}	10 μF		01.025
t _R	40 °C		14 / 17 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	54	66	67	67	69	64	56

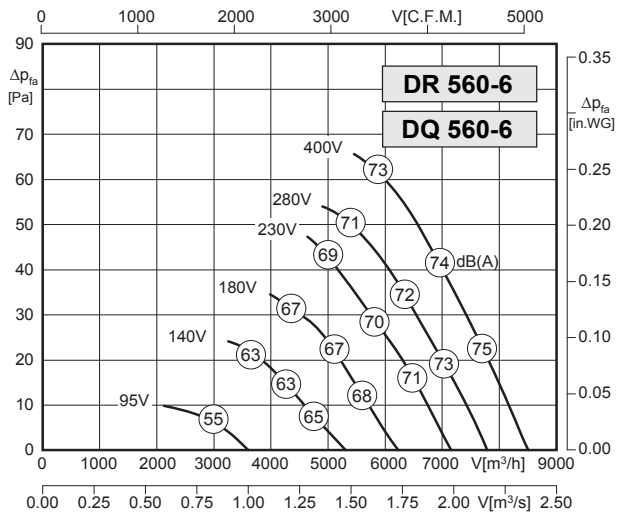

Typ / Type : DR/DQ 560-6		Art.-No. : E10-56052 / E00-56052	
U	400V (50Hz)	Δpfa min	– Pa
P ₁	0.35 kW	ΔI	– %
I _N	0.90 A	I _A / I _N	3.0
n	920 min-1		IP54
C _{400V}	– μF		01.006
t _R	55 °C		14 / 17 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	54	66	67	67	69	64	56

