

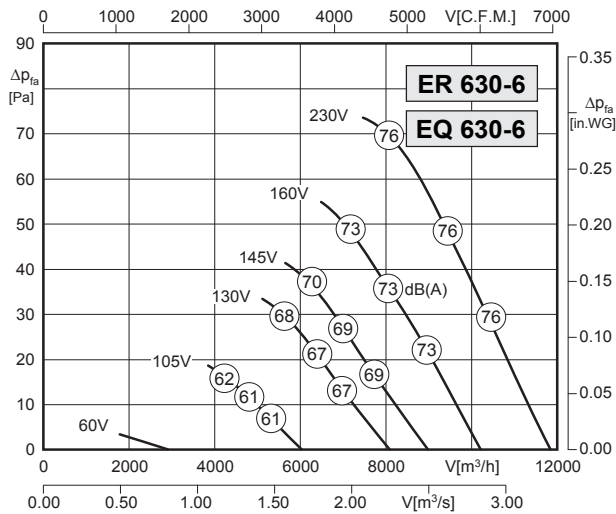


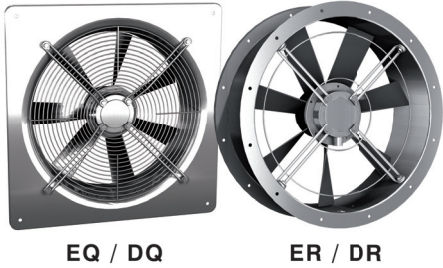

Typ / Type : ER/EQ 630-6		Art.-No. : E10-63001 / E00-63001	
U	230V (50Hz)	Δpfa min	– Pa
P ₁	0.53 kW	ΔI	6 %
I _N	2.60 A	I _A / I _N	2.3
n	910 min-1		IP54
C _{400V}	12 μF		01.025
t _R	40 °C		18 / 21 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	53	64	68	69	72	68	59

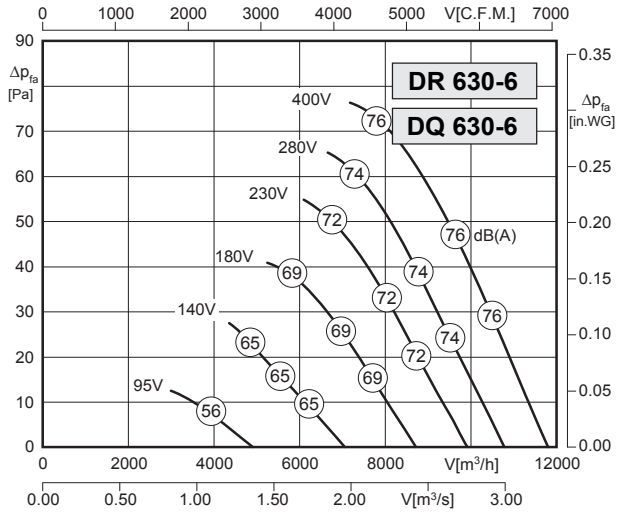

Typ / Type : DR/DQ 630-6		Art.-No. : E10-63052 / E00-63052	
U	400V (50Hz)	Δpfa min	– Pa
P ₁	0.50 kW	ΔI	– %
I _N	1.15 A	I _A / I _N	3.3
n	920 min-1		IP54
C _{400V}	– μF		01.006
t _R	55 °C		18 / 21 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax	fM [Hz]						
	125	250	500	1K	2K	4K	8K
LWA5 [dB(A)] Gehäuse / casing	53	64	68	69	72	68	59

